

CA BS 200N

LOAD IMPEDANCE FOR BS200NX ELECTRONIC SWITCHES



符合下列标准 ...

- > ISO 7637-1:1990
- > ISO 7637-2:2004
- > ISO 7637-2:2011

CA BS 200N - LOAD IMPEDANCE FOR BS200NX ELECTRONIC SWITCHES

The switching behaviour of the BS 200N series semiconductor switches shall be verified on 0.6ohm to 50uH load impedance.

The CA BS 200N is directly connected to the output of the BS 200Nx. The switching parameters of the BS 200Nx are measured with the load connected.

Additionally, the CA BS 200N includes a number of shunt resistors R_s such as 10ohm, 20ohm, 40ohm and 120ohm being required as per standards used during the emission measurement of transients as per ISO 7637-2:2011 and the former ISO 7637-2:2004.

HIGHLIGHTS

- > Verification load for electronic switch 0.6ohm / 50uH as per ISO 7637-2:2004
- > Max. supply voltage 28VDC
- > Max. load current 50A
- > Additional shunt resistors 10ohm, 20ohm, 40ohm, 120ohm built-in for emission measurement
- > Over-temperature protected

应用领域



汽车


技术细节

VERIFICATION SET-UP

VERIFICATION OF THE BS 200N SERIES SWITCHING CHARACTERISTIC

As per standard ISO 7637-2 the electronic switch BS 200Nx is requested to meet a rise/fall time specification of 300ns +/-20% in to a defined load of 0.6ohm in series with 50uH.

The CA BS 200N is set up in direct proximity to the BS 200Nx with short leads to verify the switching time characteristic. An oscilloscope of sufficient bandwidth is required to properly evaluate the rise/fall time parameters.

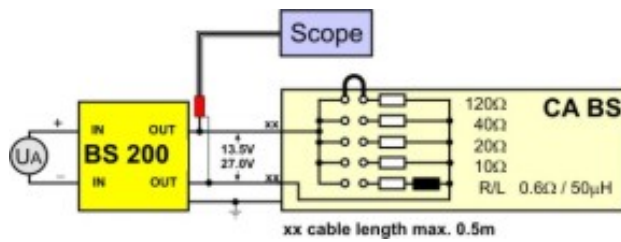

WIRING SET-UP

SET-UP OF CA BS 200N AND BS 200NX FOR VERIFICATION

In order to properly verify the rise/fall time characteristic of the electronic switch (e.g. BS 200N and BS 200N80) it is important to maintain the connection leads as short as possible. EM TEST recommend a maximum length of the connection leads between the CA BS 200N verification load (unit on the left side in the below picture) and the BS 200Nx electronic switch (right side unit in the below picture) of 0.5m.



SPECIFICATIONS

Max battery supply voltage	28Vdc
Load current	Max. 50A
Operating time	13.5V supply approx. 1 hour 28.0V supply approx. 10 minutes
Overheat indication	LED
Protection	Switch Off (overtemperature sensor)
Cooling	Forced Air

TECHNICAL DATA

Load	0.6ohm in series with 50uH
Parallel load resistor	10, 20, 40 or 120ohm, selectable via short circuit connectors

GENERAL DATA

Dimensions	19"/3HU, 133mm x 500mm x 500mm
Weight	19.1kg
Mains supply	80V to 240Vac
Fuse	1A slow blow

实力无处不在



直接联系 EM TEST

瑞士

EM TEST (Switzerland) GmbH > Sternenhofstra e 15 > 4153 Reinach > Switzerland
电话 +41 (0)61/7179191 > 传真 +41 (0)61/7179199
Internet: www.emtest.ch > 电子邮件: sales.emtest@ametek.com

德国

AMETEK CTS Germany GmbH > Lünener Stra e 211 > 59174 Kamen > Deutschland
电话 +49 (0)2307/26070-0 > 传真 +49 (0)2307/17050
Internet: www.emtest.com > 电子邮件: info.cts@ametek.de

法国

EM TEST FRANCE > Le Trident - Parc des Collines > Immeuble B1 - Etage 3 > 36, rue Paul Cézanne > 68200 Mulhouse > France
电话 +33 (0)389 31 23 50 > 传真 +33 (0)389 31 23 55
Internet: www.emtest.fr > 电子邮件: info@emtest.fr

波兰

EM TEST Polska > ul. Ogrodowa 31/35, 00-893 Warszawa > Polska
电话 +48 (0)518 64 35 12
Internet: www.emtest.com/pl > 电子邮件: infopolska.emtest@ametek.com

美国 / 加拿大

AMETEK Compliance Test Solutions > 52 Mayfield Ave. > Edison > NJ 08837
电话 +1 (732) 417-0501
Internet: www.emtest.com > 电子邮件: sales.emtest@ametek.com

中国

E & S Test Technology Limited > Rm 913, Leftbank > No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China
电话 +86 (0)10 82 67 60 27 > 传真 +86 (0)10 82 67 62 38
Internet: www.emtest.com > 电子邮件: info@emtest.com.cn

Республика Корея

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong > Giheung-gu > Yongin-si > Gyeonggi-do > Korea
电话 +82 (31) 216 8616 > 传真 +82 (31) 216 8616
Internet: www.emtest.co.kr > 电子邮件: sales@emtest.co.kr

供货范围、外观设计、技术指标等信息，均于刊印时有效，技术数据如有变化，恕不另行通知。